


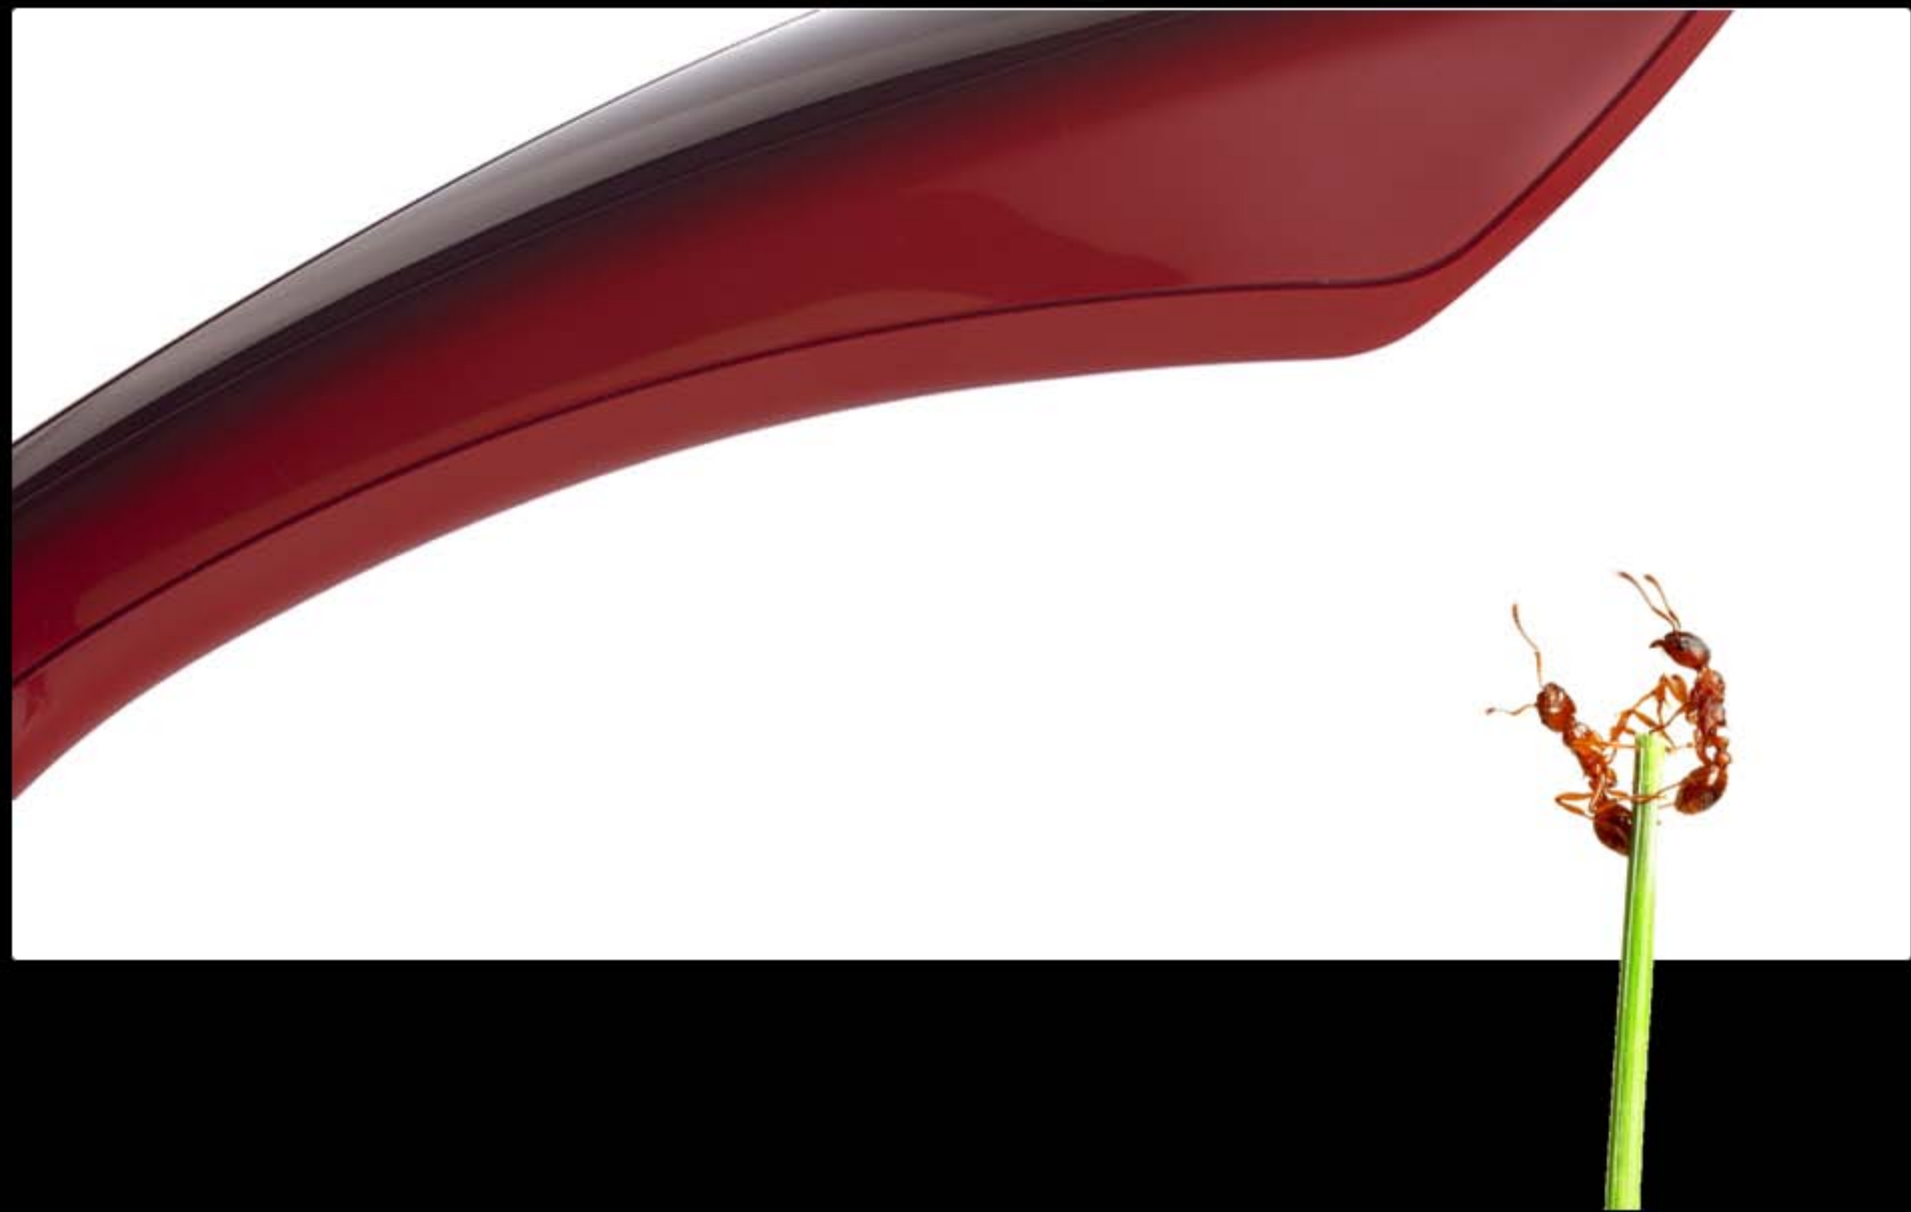

Stina Juhlin
Industridesigner MFA

Anders Wiman

Magnus Olsson
Formbestämmare

Siri Johansson
Industridesigner BFA

Johan Dahlberg
Industridesigner MFA

MYRAS KOMPETENSOMRÅDEN

Produktdesign
Interaktionsdesign
Formbestämning
Modeller och prototyper
Användartester
Projektledning

J-P Hagström
Interaktionsdesigner MFA

Jon-Karl Sundh
Industridesigner MFA

Peter Nordgren
Industridesigner MFA



Myra Industriell Design AB



red dot



Myra Industriell Design AB





Ludvig vill ha en leverpastejssmörgås.



www.karlstadmodellen.se



Rikare liv med eget språkverktyg

Studera kommunikationssituationer

Utveckla metoder som ökar träffsäkerheten

Hitta nya lösningar som ökar barnens kommunikationsmöjligheter

Testa lösningarna

Utveckla produktkoncept

www.hattenforlag.se



MAQUET





red dot



Myra Industriell Design AB

Project:

NA= not applicable

D= desirable function

U= unnecessary f.

Feature	Deg.	Annotation
---------	------	------------

Admit	Sorting/collecting	NF	color
Admit	opening/shutting	N	of lid
Simplify	opening/shutting	D	of lid
Fit	garbage	N	Diameter/square inlet / tube
Lack	sharp edges	N	
Prevent	tearing	N	of bags
Simplify	locking	D	relevant for some units
Bear	self-evidence	N/D	sorting, Open/close
Prevent	clogging	N	color
Simplify	cleaning	D	
Eliminate	need for cleaning	U	
Provide	instruction	D	for waste sorting
Fit	user	D	height, age, (dis)ability
Resist	corrosion	N	
Prevent	vandalism	D	fire, force, graffiti
Optimize	child-proof construction	N	
Bear	robustness	N/D	
Eliminate	risk for pinching	N	Hinge & lid
Minimize	wear	N/D	on components
Prevent	soiling	N/D	of surroundings
Minimize	manual power	D	needed for opening/shutting
Minimize	dexterousness	D	needed for opening/shutting
Rationalize	maneuvers	D	minimize number of
Minimize	time requirement	D	
Minimize	color	D	color
Minimize	hand contact	D	with surfaces
Prevent	bacterial growth	N/D	on handles/surfaces
Indicate	direction	D	of opening lid
Admit	temperature changes	U	
Resist	weather	N/D	snow/ice/rain/wind
Admit	modular structure	D	color
Prevent	extreme temperature	N/D	of contact surfaces
Bear	Self closing mechanism	N/D	demand from customers

PRODUCTION			
FA	basic production	U	already developed
Optimize	use of materials	0	
Real	production	N	current customer use
			product development & design
			also part of development
Simplify	transportation	U	
Enable	model variation	NO	
Minimize	number of parts	0	
Moving	volume	U	for transport
Provent	errors	0	in assembly line
Minimize	production costs	N	
Reduce	time for assembly	U	
Secure	flexibility work	U	
Reduce	own variation	NO	
Real	regulation	U	
Real	flexible investment	0	with time restrictions
Optimize	production	0	of the whole prod.
Real	stocking	NA	
	elemental components	U	
Real	dedicated surfaces	OU	for stickers, if any
Real	product identification	U	
Real	material	U	
Real	assembly	0	

INSTALLATION/MAINTENANCE		
W	mounting interconnect adjustments	N/D N/D RA
W	service contact customer service	untested, found to be height in accordance with conditions telephone re- sight/field target
W	replacement of parts add-ons	O O O
		prepared for all locking and

[illegible][illegible]

LEGISLATION			
Follows	standards		Standard



Myra Industriell Design AB



red dot



Myra Industriell Design AB





20:20mobile

TELA



Myra Industriell Design AB

PAX








Myra Industriell Design AB



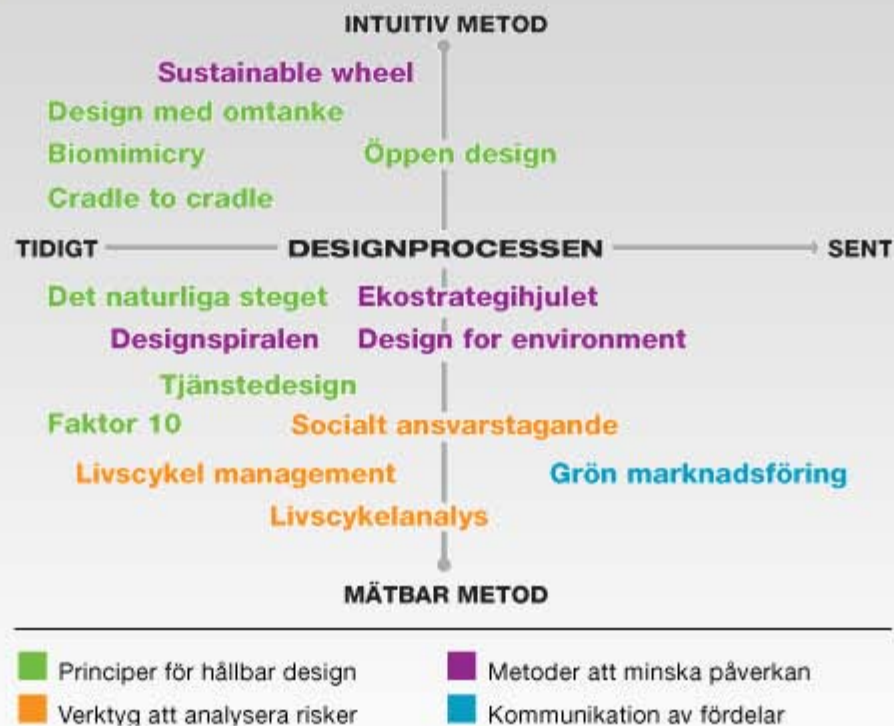



Hållbar Affärsutveckling

Så skapar du fler och lönsammare affärer!

LCA övning

8 bilder från SVID
Som tagits bort av
upphovsrättsliga skäl



